



# **R50 Blue Bar**

## SHOCKLESS STATIC NEUTRALIZING BAR

The R50 Blue Bar is a high efficiency, shockless static bar for use on webs traveling up to 2,500 fpm and in hard-to-reach applications. The R50 Blue Bar is designed for easy cleaning and offers a mounting channel with full length adjustment. Also available in a moisture resistant model.

- High performance without the use of costly compressed air
- Embedded ground reference ensuring consistent performance
- Resistantly coupled for shockless operation
- Easy to install and maintain
- Equipped with shielded cable to reduce interference

#### **Specifications**


Dimensions	0.63" x 1.25" (16 x 32 mm)
Effective Length	5.3 to 153.5" (135 to 3900 mm)
Overall Length	8.7 to 156.9" (220 to 3985 mm)
Operating Voltage	7 kVAC
Mounting	Nylon bolts and metal brackets provided
Ambient Temperature	32-176°F (0-80°C)
Connection	Standard length 7' (2.1m) fixed high voltage cable, (optional lengths available)
Approval	CE, UL

## **Blue Bar Options**


**Power Supplies**: The Blue Bar can be powered by the D167Q or D257Q Power Supplies which are ordered separately. In addition, two and four port power supplies are available.


D167Q Power Supply






## Dimensions

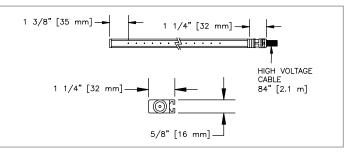

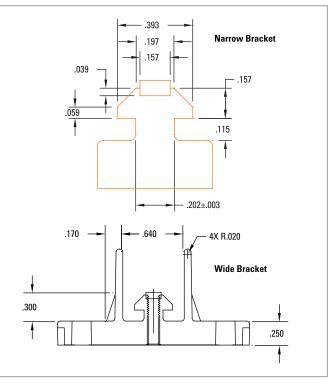

#### Installation Distance from Web (max)





P/N 5200776 Rev. K © 2020 Simco-Ion – All rights reserved. Specifications are subject to change without notice.

#### Simco-lon

2257 North Penn Road Hatfield, PA 19440-1998 Tel: 800.203.3419 (in USA) Tel: 215.822.6401

customerservice@simco-ion.com www.simco-ion.com

	worldwide	leaders in	stati	ic control
--	-----------	------------	-------	------------